



LDR SENSOR


GL7

LDR SENSOR

11k f +e 0 1e



•

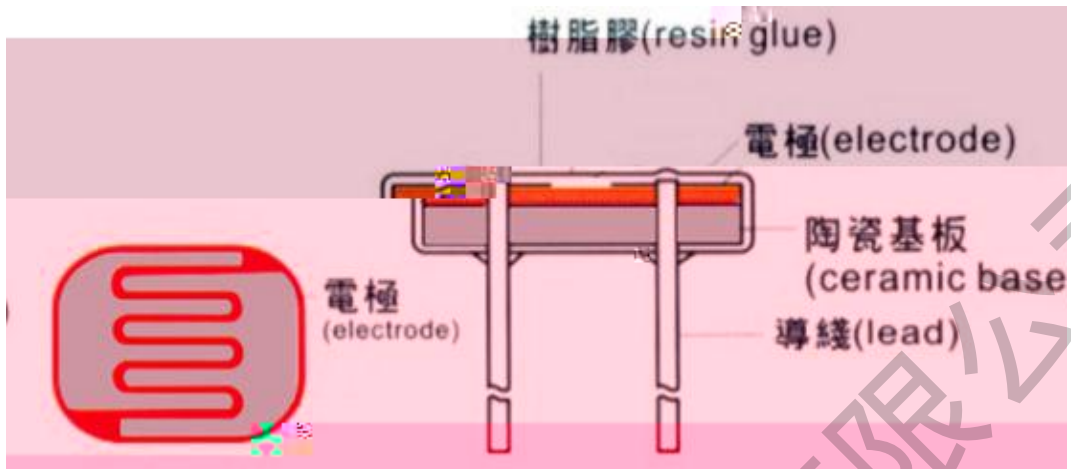

•

•



		VDC	mw		nm	10Lux (KΩ)	MΩ	y 100 10	(ms)		
Ø7	GL7516	150	100	-30 +70	540	5-10	0.5	0.6	30	30	2
	GL7528	150	100	-30 +70	540	10-20	1	0.6	30	30	3
	GL7537-1	150	150	-30 +70	560	20-30	2	0.7	30	30	4
	GL7537-2	150	150	-30 +70	560	30-50	4	0.8	30	30	4
	GL7539	150	150	-30 +70	560	50-100	8	0.8	30	30	6

0

0

10Lux

▼

1m

10

m

0

Ũ

0 25

4000600Lux

0 2

0

2856K

10Lux

0

0

↑

5

m


£ m

"

£ m




Relative Resistance (%)
電阻變化率 (%)

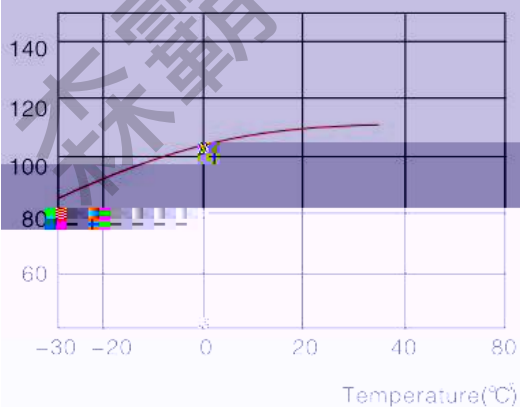


Temperature-Property. 溫度特性曲線

Relative Response (%)
相對靈敏度 (%)

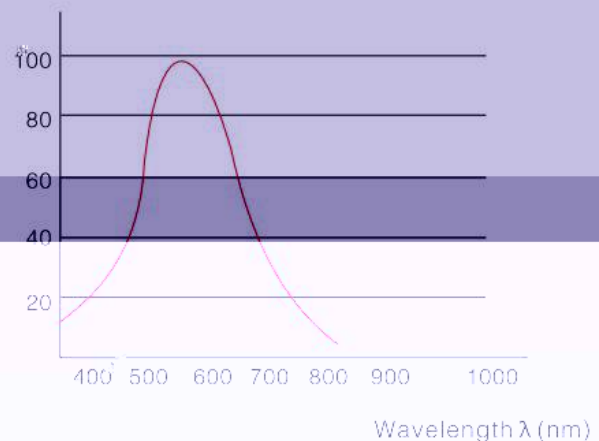

Spectrum Response Characteristic. 光譜回應特性曲線

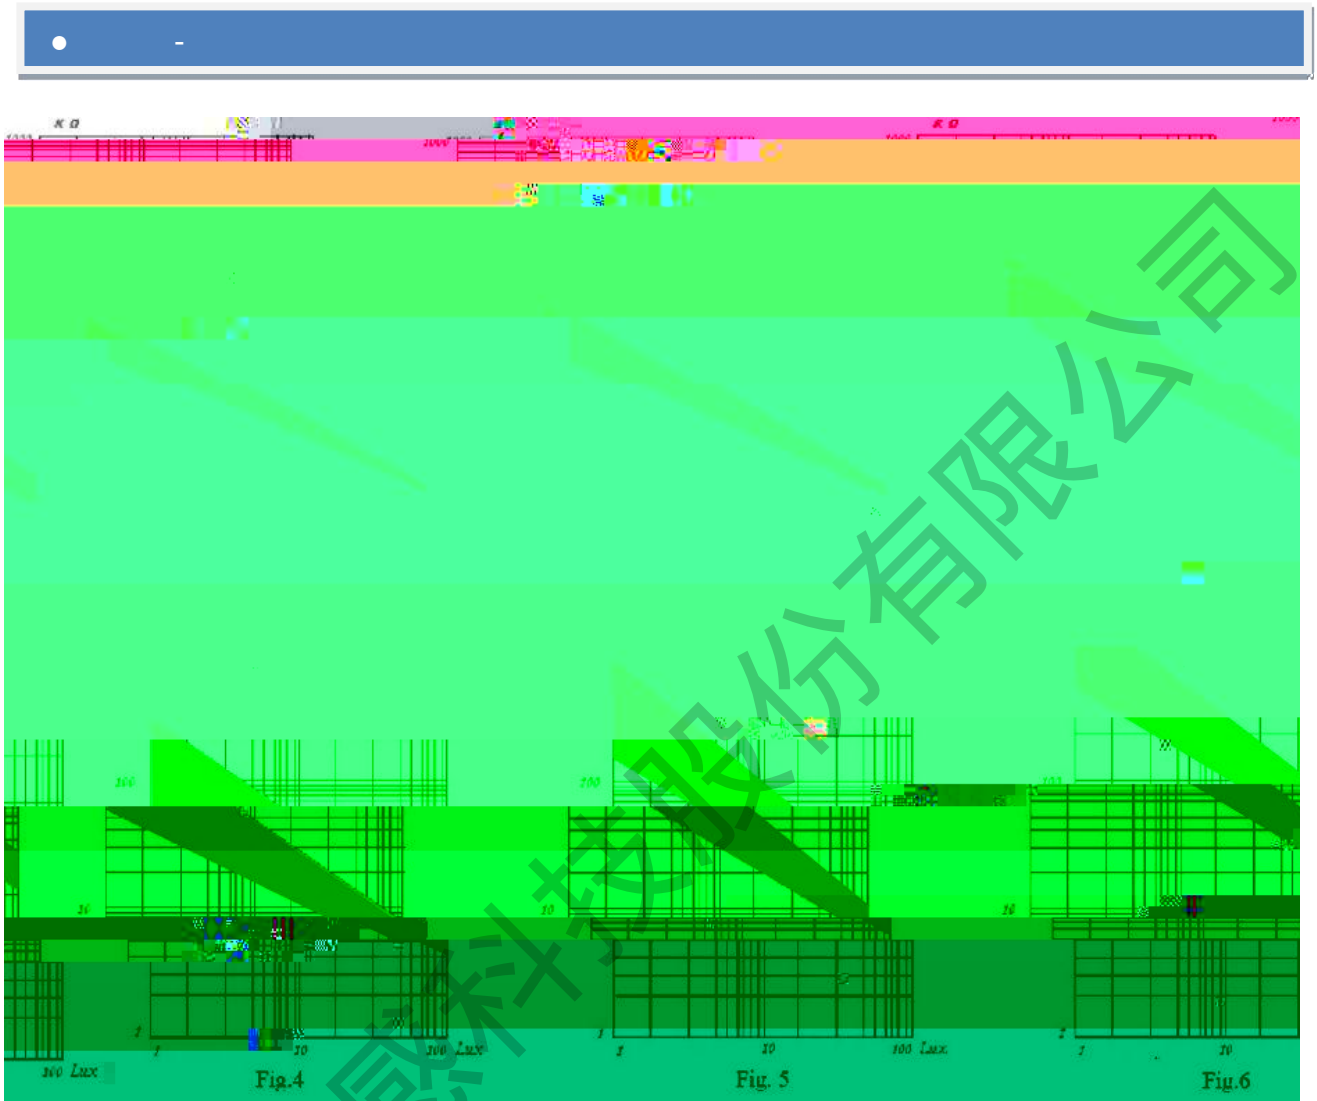



•



•

- 400 800
 -
 - $\geq 4\text{mm}$, 260
- 280 3