


LDR SENSOR





GL12

LDR SENSOR

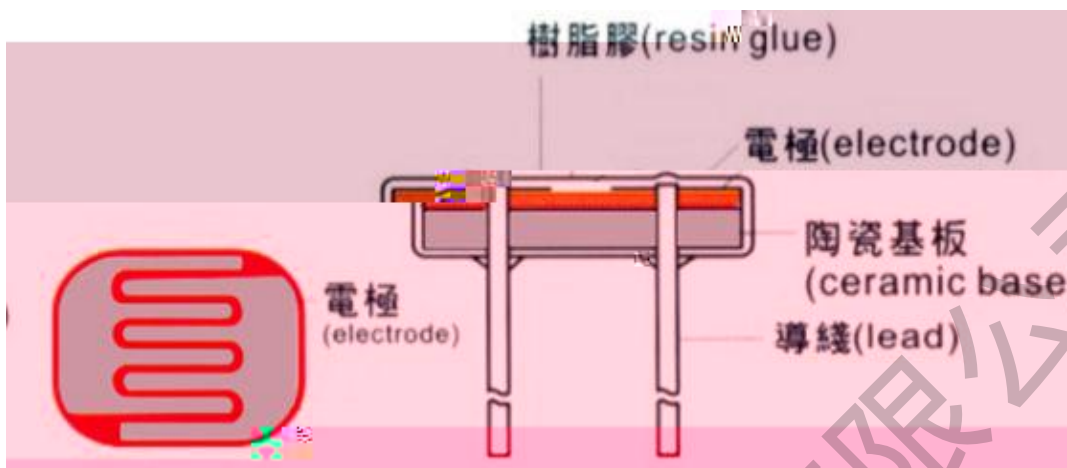


		VDC	mw		nm	10Lux (KΩ)	MΩ	y 100 10	(ms)		
Ø12	GL12516	250	200	-30 +70	560	5-10	1	0.6	30	30	3
	GL12528	250	200	-30 +70	560	10-20	2	0.6	30	30	3
	GL12537-1	250	200	-30 +70	560	20-30	3	0.7	30	30	4
	GL12537-2	250	200	-30 +70	560	30-50	5	0.7	30	30	4
	GL12539	250	200	-30 +70	560	50-100	8	0.8	30	30	6

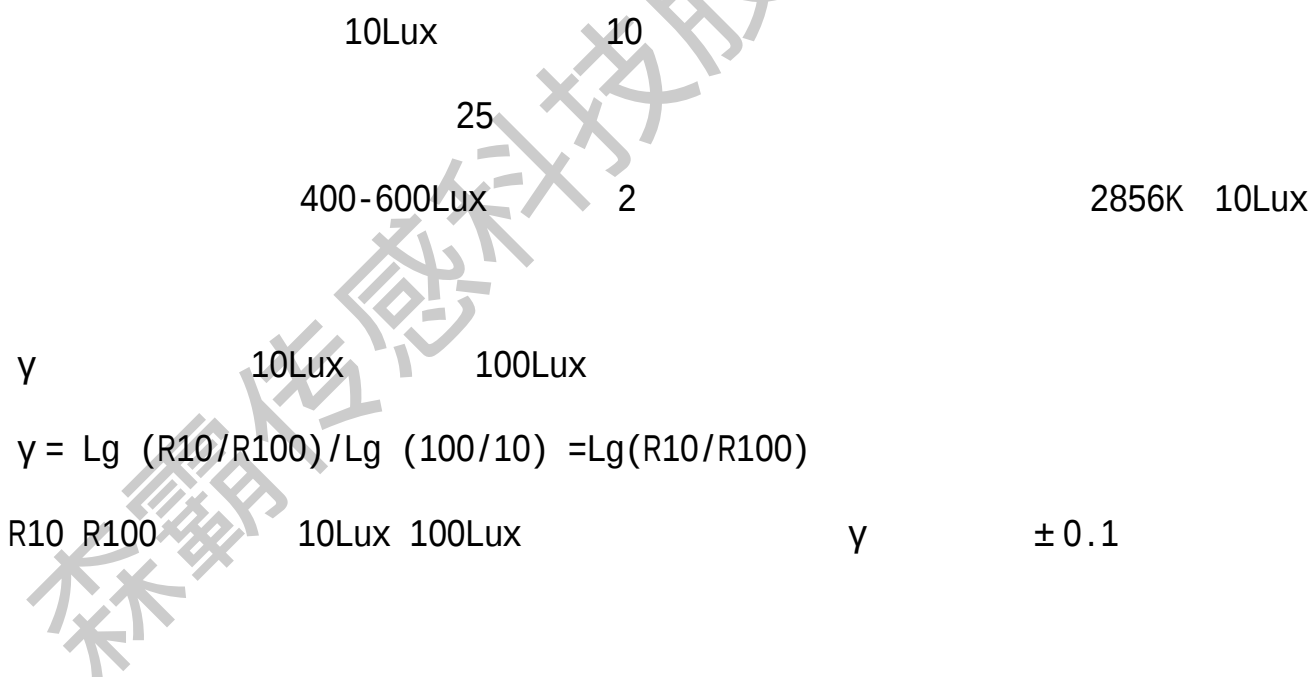

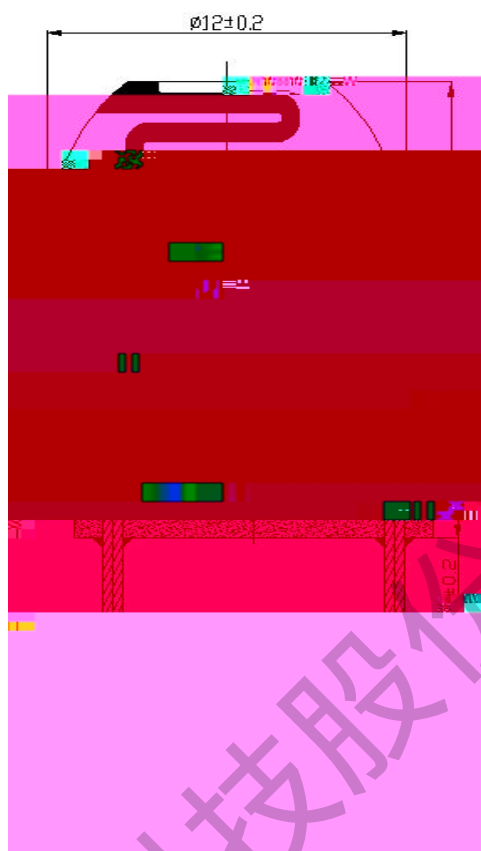


Relative Resistance(%)
電阻變化率(%)

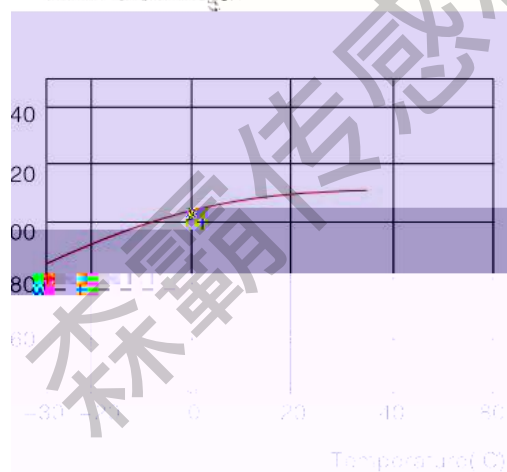



Temperature-Property, 溫度特性曲線

Relative Response(%)
相對電敏度(%)

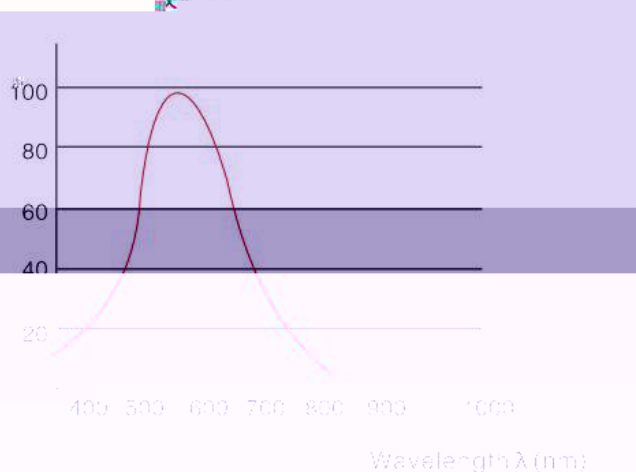

Spectrum Response Characteristic, 光譜電敏特性曲線

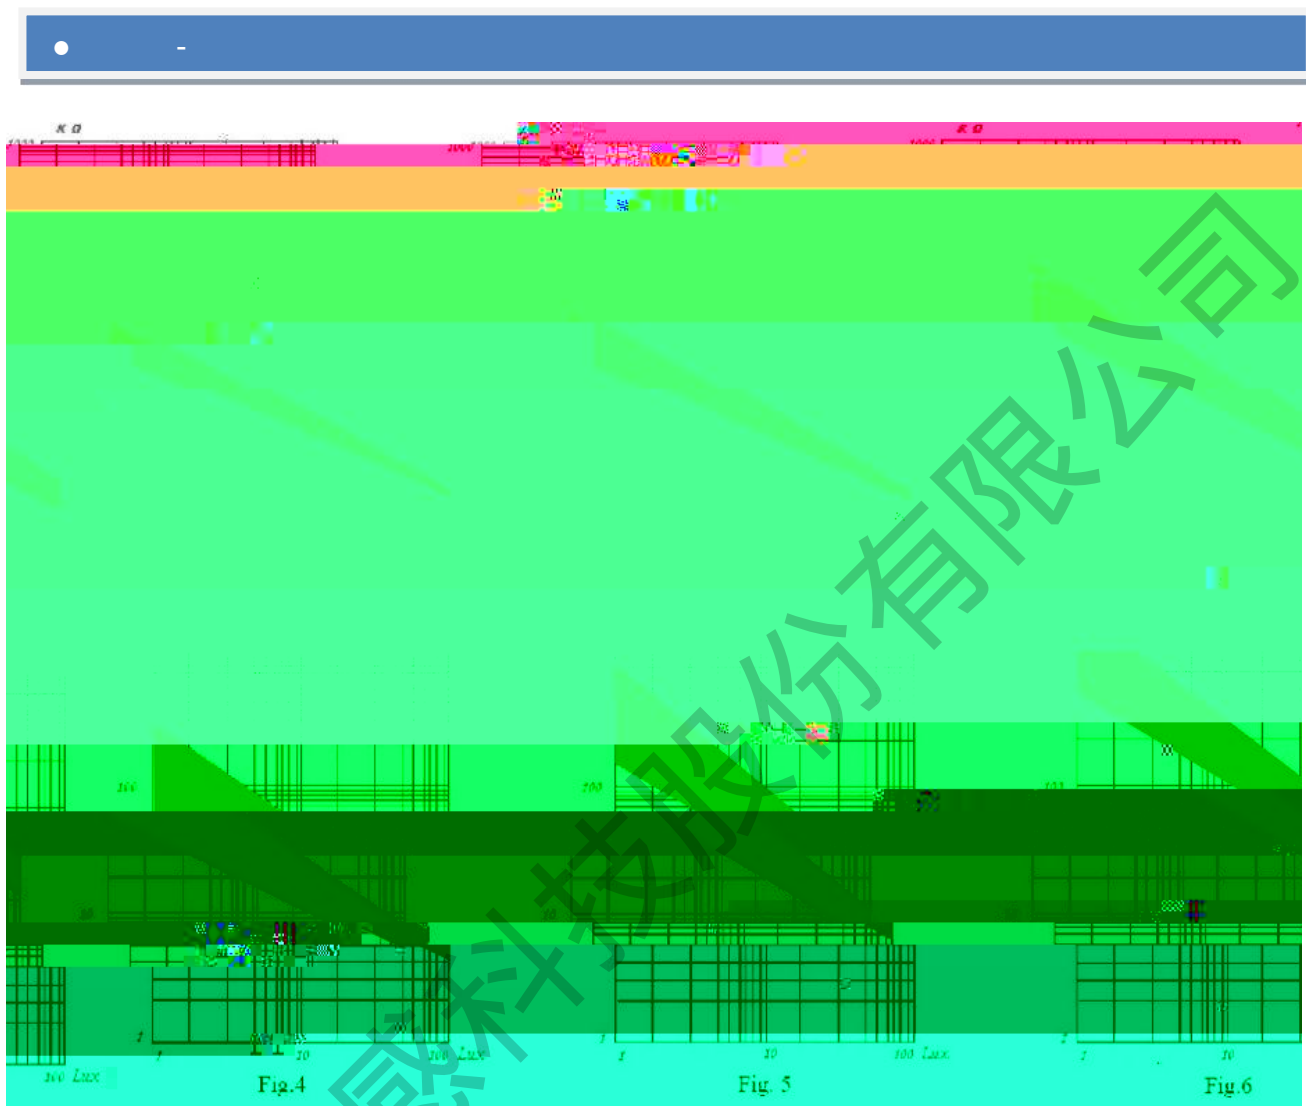



- 125 250
-
- $\geq 4\text{mm}$, 260
- --280 3