





## ● 主要特性

- 
- 
- 
- 

## ● 典型应用


- 
- 
- 
-



|  |                                         |
|--|-----------------------------------------|
|  | LCR-0202                                |
|  | DIP-4                                   |
|  | 0—20 mA                                 |
|  | 1.6—2.5 Vdc                             |
|  | 50Ω - 1KΩ @ 20mA - 0.01mA               |
|  | 1Ω - 10MΩ @ 10s off later 1Ω - 10MΩ 10s |
|  | 2.5mS                                   |
|  | 2500VRMS                                |
|  | 300KHz                                  |
|  | 50V                                     |
|  | 100dB                                   |
|  | 5pF                                     |
|  | 100mW                                   |
|  | LED                                     |
|  | -30—+70                                 |
|  | -40—+80                                 |



## 外形尺寸

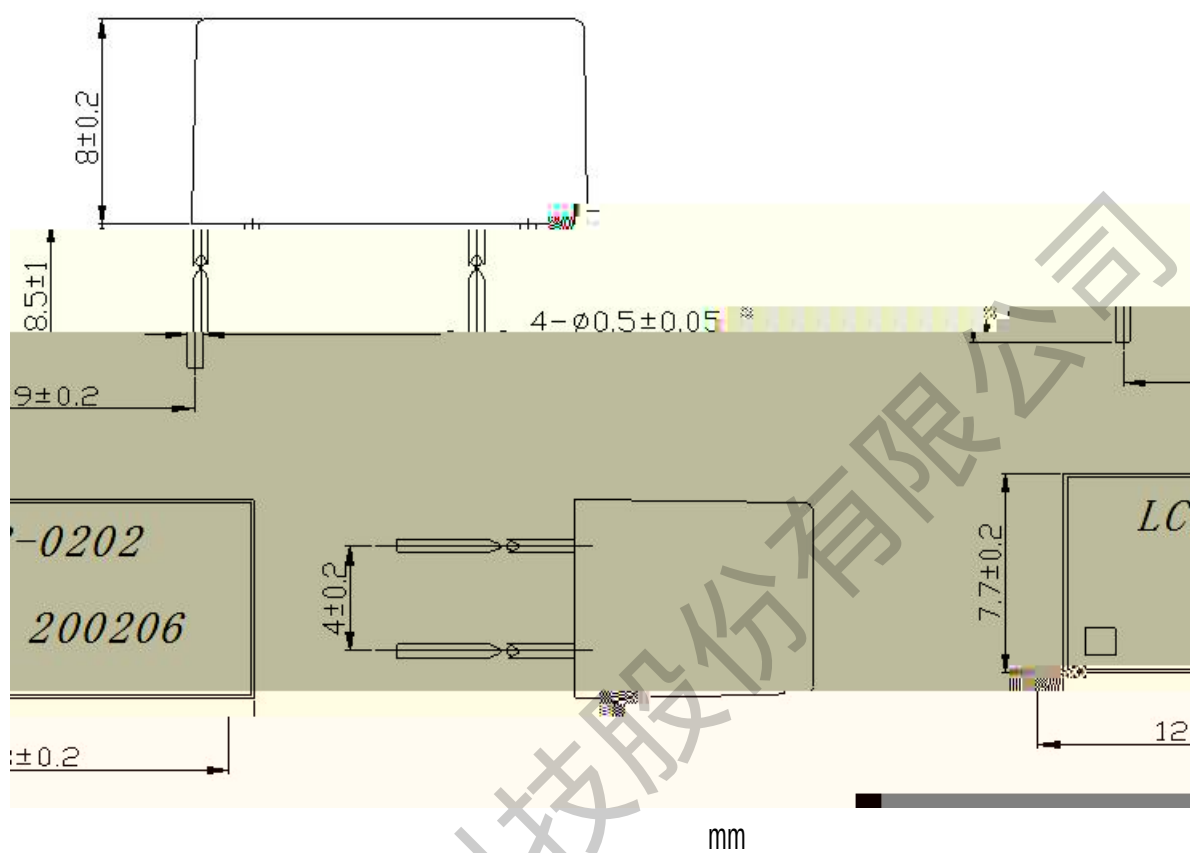

使用注意及标准包装

- $\geq 4\text{mm}$ , 260 -- 280
- 3
- 100 3000